

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER <b>FUKASAWA 2</b>
<b>TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371</b>		U.S. APPLICATION NO (If known, see 37 CFR 1.5) <b>09/763421</b>
INTERNATIONAL APPLICATION NO. <b>PCT/JP00/04006</b>	INTERNATIONAL FILING DATE <b>PCT/JP00/04006</b>	PRIORITY CLAIMED <b>23 June 1999</b>
TITLE OF INVENTION <b>LIGHT EMITTING DIODE</b>		
APPLICANT(S) FOR DO/EO/US <b>Koichi FUKASAWA et al.</b>		
<p>Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:</p> <ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).</li> <li>4. <input type="checkbox"/> The US has been elected in a Demand by the expiration of 19 months from the priority date (PCT Article 31).</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))             <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> is attached hereto (required only if not transmitted by the International Bureau).</li> <li>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</li> <li>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))             <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> have been communicated by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired</li> <li>d. <input checked="" type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</li> <li>10. <input type="checkbox"/> An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol> <p><b>Items 11. to 16. below concern document(s) or information included:</b></p> <ol style="list-style-type: none"> <li>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</li> <li>12. <input type="checkbox"/> An Assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</li> <li>13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input checked="" type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</li> <li>14. <input type="checkbox"/> A substitute specification.</li> <li>15. <input type="checkbox"/> A change of power of attorney and/or address letter.</li> <li>16. <input checked="" type="checkbox"/> Other items or information:             <ul style="list-style-type: none"> <li><input checked="" type="checkbox"/> Courtesy copy of the first page of the International Publication (WO 00/79605).</li> <li><input checked="" type="checkbox"/> Formal drawings, 12 sheets, Figures 1-23.</li> <li><input checked="" type="checkbox"/> Courtesy Copy of the International Search Report.</li> </ul> </li> </ol>		

U.S. APPLICATION NO. (If known, see 37 CFR 1.5)		International Application No.		Attorney's Docket No.	
<b>09/763421</b>		<b>PCT/JP00/04006</b>		<b>FUKASAWA 2</b>	

17. [xx] The following fees are submitted: <b>BASIC NATIONAL FEE (37 CFR 1.492 (a)(1)-(5):</b> Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO.....\$1000.00  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO.....\$860.00  International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO.....\$710.00  International preliminary examination fee paid to USPTO (37 CFR 1.482) but all claims did not satisfy provisions of PCT Article 33(1)-(4).....\$690.00  International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(1)-(4).....\$100.00				CALCULATIONS PTO USE ONLY	
ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 860.00					
Surcharge of \$130.00 for furnishing the oath or declaration later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(e)). \$					
Claims as Originally Presented	Number Filed	Number Extra	Rate		
Total Claims	15 - 20		X \$18.00 \$		
Independent Claims	2 - 3		X \$80.00 \$		
Multiple Dependent Claims (if applicable)			+\$270.00 \$		
<b>TOTAL OF ABOVE CALCULATIONS =</b>			\$ 860.00		
Claims After Post Filing Prel. Amend	Number Filed	Number Extra	Rate		
Total Claims	25 - 20	05	X \$18.00 \$ 90.00		
Independent Claims	2 - 3		X \$78.00 \$		
<b>TOTAL OF ABOVE CALCULATIONS =</b>			\$ 950.00		
Reduction of 1/2 for filing by small entity, if applicable. Applicant claims small entity status. See 37 CFR 1.27. \$					
<b>SUBTOTAL =</b>			\$ 950.00		
Processing fee of \$130.00 for furnishing the English translation later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(f)). \$					
<b>TOTAL NATIONAL FEE =</b>			\$ 950.00		
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +					
<b>TOTAL FEES ENCLOSED =</b>			\$ 950.00		
			Amount to be:		
			refunded \$		
			charged \$		

a. [ ] A check in the amount of \$\_\_\_\_\_ to cover the above fees is enclosed.

b. [ ] Credit Card Payment Form (PTO-2038), authorizing payment in the amount of \$\_\_\_\_\_, is attached.


c. [X] Please charge my Deposit Account No. **02-4035** in the amount of \$ 950.00 to cover the above fees.  
 A duplicate copy of this sheet is enclosed.

d. [XX] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment  
 to Deposit Account No. **02-4035**. A duplicate copy of this sheet is enclosed.

**NOTE:** Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or  
 (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

**BROWDY AND NEIMARK, P.L.L.C.**  
**624 NINTH STREET, N.W., SUITE 300**  
**WASHINGTON, D.C. 20001**  
**TEL: (202) 628-5197**  
**FAX: (202) 737-3528**  
**Date of this submission: February 22, 2001**

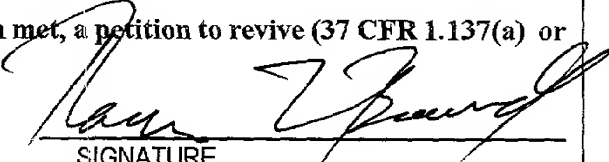  
 SIGNATURE  
 Roger L. Browdy  
 NAME  
 25,618  
 REGISTRATION NUMBER

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:  
Koichi FUKASAWA etal.

Art Unit:

IA No.: PCT/JP00/04006

IA Filed: 20 June 2000

Washington, D.C.

U.S. App. No.:  
(Not Yet Assigned)

National Filing Date:  
(Not Yet Received)

February 22, 2001

For: LIGHT EMITTING DIODE

Docket No.: FUKASAWA 2

SUPPLEMENTAL PRELIMINARY AMENDMENT

Honorable Commissioner for Patents and Trademarks  
Washington, D.C. 20231

Sir:

Prior to examination upon the merits, kindly amend as follows:

IN THE CLAIMS

Please add the following claims:

--16. The light emitting diode according to claim 3, characterized in that: said fluorescent material containing layer is composed of a fluorescent material dispersed into an adhesive; and a back of said light emitting diode element is firmly fixed to said base by the adhesive action of said fluorescent material containing layer.

17. The light emitting diode according to claim 3, characterized in that: said fluorescent material containing layer is formed with a fluorescent material and an adhesive separate from each other; and a fluorescent material containing resin layer and an adhesive layer are formed in layers on a top surface of said base.

18. The light emitting diode according to claim 3, characterized in that said fluorescent material containing layer is a fluorescent material containing resin sheet pasted on a top surface of said base.

19. The light emitting diode according to claim 3, characterized in that a periphery of said fluorescent material containing layer is surrounded by a dam provided on a top surface of said base.

20. The light emitting diode according to claim 3, characterized in that a reflecting surface is arranged on a bottom side of said fluorescent material containing layer or a top surface of said base.

21. The light emitting diode according to claim 3, characterized in that an upward reflecting surface tilting outward is arranged around said light emitting diode elements.

22. The light emitting diode according to claim 3, characterized in that a lens portion of convex shape is formed on a top side of said resin seal member.

23. The light emitting diode according to claim 3, characterized in that: said resin seal member is formed flat

at a top side; and a fluorescent material containing layer is formed on the top side.

24. The light emitting diode according to claim 3, characterized in that said base is a glass epoxy substrate, a solid-molded substrate of liquid crystal polymer, or a sheet metal substrate.

25. The light emitting diode according to claim 3, characterized in that: said light emitting diode element is connected to a pair of electrodes arranged on said base; and said electrodes are surface-mounted directly to printed wires on a motherboard.

REMARKS

Claims 1-25 presently appear in this case. The above amendments to the claims are being made in order to add new claims and to restore at least partly the varying scope of claims which was eliminated by the elimination of multiple dependencies in the claims.

Favorable consideration is earnestly solicited.

Respectfully submitted,

BROWDY AND NEIMARK, P.L.L.C.  
Attorneys for Applicant

By: 

Roger L. Browdy  
Registration No. 25,618

RLB:wrđ  
Telephone No.: (202) 628-5197  
Facsimile No.: (202) 737-3528

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:	)	Art Unit:
Koichi FUKASAWA et al.	)	
	)	
	)	
IA No.: PCT/JP00/04006	)	
	)	Washington, D.C.
IA Filed: 20 June 2000	)	
	)	
U.S. App. No.:	)	
(Not Yet Assigned)	)	
	)	February 22, 2001
National Filing Date:	)	
(Not Yet Received)	)	
	)	
For: LIGHT EMITTING DIODE	)	Docket No.: FUKASAWA 2

PRELIMINARY AMENDMENT

Honorable Commissioner for Patents and Trademarks  
Washington, D.C. 20231

Sir:

Contemporaneous with the filing of this case and  
prior to calculation of the filing fee, kindly amend as  
follows:

IN THE SPECIFICATION

After the title please insert the following  
paragraph:

REFERENCE TO RELATED APPLICATIONS

--The present application is the national stage  
under 35 U.S.C. §371 of international application  
PCT/JP00/04006, filed 20 June 2000 which designated the United  
States, and which application was not published in the English  
language.--

In re of: Koichi FUKASAWA et al (FUKASAWA 2)

1 1

IN THE CLAIMS

Claim 4, line 1, delete "or 3".

Claim 5, line 1, delete "or 3".

Claim 6, line 1, delete "or 5".

Claim 7, line 1, delete "or 3".

Claim 8, lines 1 and 2, delete "any of claims 4, 5, and 7", and insert therefor --claim 4--.

Claim 9, line 1, delete "or 3".

Claim 10, line 1, delete "or 3".

Claim 11, line 1, delete "or 3".

Claim 12, line 1, delete "or 3".

Claim 13, line 1, delete "or 3".

Claim 14, line 1, delete "or 3".

Claim 15, line 1, delete "or 3".

REMARKS


The above amendment to the specification is being made to insert reference to the PCT application of which the present case is a U.S. national stage. The above amendments

In re of: Koichi FUKASAWA et al (FUKASAWA 2)

to the claims are being made in order to eliminate any properly multiply dependent claims, for the purpose of reducing the filing fee. Please enter this amendment prior to calculation of the filing fee in this case.

Favorable consideration is earnestly solicited.

Respectfully submitted,  
BROWDY AND NEIMARK, P.L.L.C.  
Attorneys for Applicant

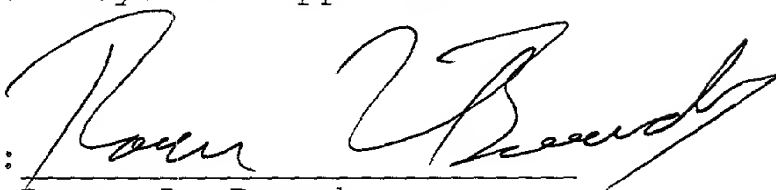By:   
Roger L. Browdy  
Registration No. 25,618

RLB:wrđ  
Telephone No.: (202) 628-5197  
Facsimile No.: (202) 737-3528



# SPECIFICATION

## LIGHT EMITTING DIODE

### 5 Technical Field

The present invention relates to a light emitting diode of wavelength conversion type, and more particularly to a type of light emitting diode which converts blue luminescence into white.

10

### Background Art

15

20

25

Conventionally, among this kind of light emitting diodes of wavelength conversion type are known the one shown in Fig. 22 (Japanese Patent No. 2900928) and the one shown in Fig. 23 (Japanese Patent Laid-Open Publication No. Hei 7-99345). The former one is a light emitting diode 1 of lead frame type, having a structure in which: a recess 3 is arranged in a metal stem 2, one of the lead frames; a light emitting diode element 4 made of gallium nitride type compound semiconductor is placed on and fixed to this recess 3; and this light emitting diode element 4 is connected with the aforementioned metal stem 2 and a metal post 5, the other lead frame, by using bonding wires 6 and 7, respectively; the whole being sealed by a transparent resin 9 of bombshell form. A fluorescent material 8 for wavelength conversion is dispersed into the transparent resin 9 mentioned

above. When the light emitting diode 1 is lit, the light emitted from the light emitting diode element 4 impinges the fluorescent substance 8 and is converted into yellow so that it can blend with the original blue luminescence from the light emitting diode element 4 to present white in luminescent color.

Then, in the latter one, a light emitting diode element 4 for blue luminescence, made of gallium nitride type compound semiconductor is placed on and fixed to a recess 3 in the above-mentioned metal stem 2, and a fluorescent material containing resin 8 is filled into the above-mentioned recess 3 so as to cover the top of this light emitting diode element 4. Accordingly, in the light emitting diode 1 having such a configuration, the blue luminescence emitted from the light emitting diode element 4 excites the fluorescent material in the fluorescent material containing resin 8, and the light converted thus in wavelength blends with the original blue luminescence from the light emitting diode element 4 to come out as white luminescence.

Nevertheless, among the conventional light emitting diodes 1 described above, the former had the problem that since the fluorescent material 8 is dispersed into the transparent resin 9 which seals the light emitting diode element 4, the light passing through the transparent resin 9 drops in transmittance, decreasing the intensity of the white luminescence. It also had the problem that the fluorescent material 8 is higher than

the transparent resin 9 in specific gravity and thus is difficult to disperse uniformly, causing chromaticity variations not only between different light emitting diodes but also within a single light emitting diode.

5           On the other hand, the latter had the problem that since the fluorescent material containing resin 8 covers the vicinity of the top of the light emitting diode element 4, the transmission of the light from the light emitting diode element 4 is hampered by the fluorescent material so that white  
10 luminescence of high intensity cannot be obtained.

It is thus an object of the present invention to provide a light emitting diode improved in the intensity of white luminescence and suppressed in chromaticity variations.

#### 15 Disclosure of the Invention

A light emitting diode according to the present invention comprises a light emitting diode element mounted on a base, the light emitting diode element being protected at its surface side by a resin seal member, the light emitting diode being  
20 characterized in that a fluorescent material containing layer is arranged on the back side of the aforesaid light emitting diode element.

According to this invention, the fluorescent material containing layer is arranged on the back side of the light  
25 emitting diode element so that the light from the light emitting

diode element is converted in waveform at the back side of the light emitting diode. This eliminates the need for a wavelength-converting fluorescent material to be dispersed into the resin seal member which protects the surface side of the light emitting diode element. Therefore, the resin seal member improves in light transmittance, allowing an increase in the luminescent intensity of the light emitting diode.

Besides, a light emitting diode according to another aspect of the present invention is characterized in that the aforesaid light emitting diode element is a light emitting diode element made of gallium nitride type compound semiconductor or SiC type compound semiconductor.

According to this invention, the fluorescent material containing layer is arranged on the back side of the blue-luminescence light emitting diode element formed of the above-mentioned compound, so that the light from the light emitting diode element is converted in wavelength at the back side of the light emitting diode element. Therefore, white luminescence of high luminescent intensity is obtained.

Moreover, a light emitting diode according to another aspect of the present invention comprises two or more light emitting diode elements mounted on a base, the light emitting diode elements being protected at their surface side by a resin seal member, the light emitting diode being characterized in that: at least one of the aforesaid two or more light emitting

diode elements is a light emitting diode element for blue luminescence, made of gallium nitride type compound semiconductor or SiC type compound semiconductor; and a fluorescent material containing layer is arranged on the back side of this light emitting diode element for blue luminescence.

According to this invention, multicolor luminescence including white luminescence can be achieved by simple means.

Furthermore, a light emitting diode according to another aspect of the present invention is characterized in that: the aforesaid fluorescent material containing layer is composed of a fluorescent material dispersed into an adhesive; and the back of the light emitting diode element is firmly fixed to the base by the adhesive action of this fluorescent material containing layer.

According to this invention, the dispersion of the fluorescent material into the adhesion makes it possible to arrange the fluorescent material simultaneously during the process of adhesive bonding the light emitting diode element.

Besides, a light emitting diode according to another aspect of the present invention is characterized in that; the aforesaid fluorescent material containing layer is formed with a fluorescent material and an adhesive separate from each other; and a fluorescent material containing resin layer and an adhesive layer are formed in layers on the top surface of the base.

According to this invention, the fluorescent material and the adhesive are formed in separate layers on the base. This ensures a greater thickness of the fluorescent material content and facilitates thickness control as well, with the advantage  
5 that the degree of blending with blue luminescence is easy to adjust.

Moreover, a light emitting diode according to another aspect of the present invention is characterized in that the aforesaid fluorescent material containing layer is formed on  
10 the top surface of the base by printing means.

According to this invention, overprinting can be performed to secure a thickness of the fluorescent material containing layer and control the thickness as well.

Furthermore, a light emitting diode according to another aspect of the present invention is characterized in that the  
15 aforesaid fluorescent material containing layer is a fluorescent material containing resin sheet pasted on the top surface of the base.

According to this invention, the thickness of the  
20 fluorescent material containing resin sheet can be appropriately adjusted so as to secure a thickness of the fluorescent material containing layer and control the thickness as described above.

Besides, a light emitting diode according to another  
25 aspect of the present invention is characterized in that the

aforesaid fluorescent material is an yttrium compound.

According to this invention, the use of an yttrium compound for the fluorescent material allows efficient wavelength conversion from visible light of shorter wavelength  
5 into visible light of longer wavelength.

Moreover, a light emitting diode according to another aspect of the present invention is characterized in that the periphery of the aforesaid fluorescent material containing layer is surrounded by a dam provided on the top surface of the  
10 aforesaid base.

According to this invention, surrounding the periphery of the fluorescent material containing layer by the dam makes it possible to ensure a predetermined thickness of the fluorescent material containing layer, as well as to secure a  
15 uniform thickness under the entire bottom surface of the light emitting diode element.

Furthermore, a light emitting diode according to another aspect of the present invention is characterized in that a reflecting surface is arranged on the bottom side of the  
20 aforesaid fluorescent material containing layer or the top surface of the base.

According to this invention, a thin film layer of high reflectivity, such as copper foil and aluminum foil, can be arranged on the bottom side of the fluorescent material  
25 containing layer so that the yellow luminescence converted in

wavelength by the fluorescent material is reflected upward with efficiency.

Besides, a light emitting diode according to another aspect of the present invention is characterized in that an upward reflecting surface tilting outward is arranged around the aforesaid fluorescent material containing layer.

According to this invention, the light emitted in all directions from the light emitting diode element are gathered upward by the reflecting surface, thereby achieving a further improvement in intensity.

Moreover, a light emitting diode according to another aspect of the present invention is characterized in that a lens portion of convex shape is formed on the top side of the aforesaid resin seal member.

According to this invention, because the lens portion of convex shape is formed on the top surface of the resin seal member, light traveling straight through the resin seal member is refracted upward at the interface surface, enhancing the upward light-gathering power.

Furthermore, a light emitting diode according to another aspect of the present invention is characterized in that: the aforesaid resin seal member is formed flat at the top side; and a fluorescent material containing layer is formed on the top side.

According to this invention, the formation of the



fluorescent material containing layer on the top side of the resin seal material allows color adjustment on the top side.

Besides, a light emitting diode according to another aspect of the present invention is characterized in that the aforesaid base is a glass epoxy substrate, a solid-molded substrate of liquid crystal polymer, or a sheet metal substrate.

According to this invention, glass epoxy substrates, solid-molded substrates of liquid crystal polymer, and sheet metal substrates can be selected as the base of the light emitting diode.

Moreover, a light emitting diode according to another aspect of the present invention is characterized in that: the aforesaid light emitting diode element is connected to a pair of electrodes arranged on the base; and these electrodes are surface-mounted directly to print wires on a motherboard.

According to this invention, it is a structure best suitable for a chip-type light emitting diode of surface mount type and excellent in productivity.

## Brief Description of the Drawings

Fig. 1 is a perspective view of a light emitting diode showing a first embodiment of the present invention;

Fig. 2 is a sectional view along the line A-A in Fig. 1, at motherboard mounting;

Fig. 3 is a conceptual diagram showing the principle of

the wavelength conversion at the back side of the light emitting diode element in the above-mentioned light emitting diode;

Fig. 4 is a perspective view of a light emitting diode with the light emitting diode element placed on the cathode electrode;

Fig. 5 is a perspective view showing a part of the cathode electrode provided with a dam, in a second embodiment of the present invention;

Fig. 6 is a sectional view of the light emitting diode according to the second embodiment mentioned above;

Fig. 7 is a perspective view of a light emitting diode showing a third embodiment of the present invention in which a lens portion of convex shape is formed on the seal resin member;

Fig. 8 is a sectional view along the line B-B in Fig. 7, at motherboard mounting;

Fig. 9 is a perspective view of a light emitting diode showing a fourth embodiment of the present invention in which a reflecting frame is arranged around the light emitting diode element;

Fig. 10 is a sectional view of the light emitting diode made of a rectangular-solid resin seal member in the fourth embodiment mentioned above;

Fig. 11 is a perspective view of a light emitting diode showing a fifth embodiment of the present invention which uses a solid-molded substrate;

Fig. 12 is a sectional view along the line C-C in Fig. 11 mentioned above;

Fig. 13 is a sectional view of a light emitting diode showing a sixth embodiment of the present invention which uses  
5 a solid-molded substrate;

Fig. 14 is a sectional view of a light emitting diode showing a seventh embodiment of the present invention in which a fluorescent material containing layer is formed on the topside of the seal resin member;

10 Fig. 15 is a sectional view of a light emitting diode showing an eighth embodiment of the present invention in which the fluorescent material and the adhesive in the fluorescent material containing layer are separated;

15 Fig. 16 is a perspective view of a light emitting diode showing a ninth embodiment of the present invention which uses a sheet metal substrate;

Fig. 17 is a sectional view along the line D-D in Fig. 16 mentioned above;

20 Fig. 18 is a sectional view of a light emitting diode showing another embodiment which uses a solid-molded substrate;

Fig. 19 is a perspective view of a multicolor light emitting diode showing a tenth embodiment of the present invention;

25 Fig. 20 is a perspective view of a multicolor light emitting diode showing an eleventh embodiment of the present

invention;

Fig. 21 is a perspective view of a multicolor light emitting diode showing a twelfth embodiment of the present invention;

5 Fig. 22 is a sectional view showing an example of a conventional wavelength-conversion type light emitting diode; and

10 Fig. 23 is a sectional view showing another example of a conventional wavelength-conversion type light emitting diode.

#### Best Mode for Carrying Out the Invention

15 For further details of the light emitting diode of the present invention, description thereof will be given with reference to the accompanying drawings.

Figs. 1 through 3 show an embodiment in the case of application to a surface mount type light emitting diode. The surface mount type light emitting diode 11 according to this embodiment achieves the surface mounting in such a manner that  
20 a pair of topside electrodes 13, 14 (cathode electrode and anode electrode) are patterned with a rectangular glass epoxy substrate (hereinafter, referred to as glass epoxy substrate) 12 as the base, and underside electrodes integrally formed thereto are fixed to printed wires 16 and 17 on a motherboard  
25 15 with solder 18.

A light emitting diode element 20 is mounted on the topside center of the above-mentioned glass epoxy substrate 12, and is fixed to the glass epoxy substrate 12 with a fluorescent material containing layer 21 applied to its back side. This  
5 light emitting diode element 20 is a blue light emitting element made of gallium nitride type compound semiconductor. As shown in Fig. 3, it has a structure in which an n-type semiconductor 32 and a p-type semiconductor 24 are grown on the top surface of a sapphire substrate 22. The n-type semiconductor 23 and  
10 the p-type semiconductor 24 are provided with electrodes 25 and 26, and connected to the topside electrodes 13 and 14 arranged on the above-mentioned glass epoxy substrate 12 with bonding wires 27 and 28 for blue luminescence.

On the other hand, the fluorescent material containing  
15 layer 21 arranged on the back side of the light emitting diode element 20 is composed of, as shown in Fig. 3, an appropriate amount of fluorescent material 30 uniformly dispersed into an adhesive 29 as a base. This is applied by print to the top surface of the glass epoxy substrate 12 with a predetermined  
20 thickness. With the light emitting diode element 20 placed thereon, the adhesive 29 is heat solidified to fix the back side of the light emitting diode element 20 to the top surface of the glass epoxy substrate 12. The firm adhesion obtained  
25 between the adhesive 29 and the glass epoxy substrate 12 prevents the fluorescent material containing layer 21 from

coming off. Incidentally, a fluorescent material containing resin sheet composed of a fluorescent material kneaded into a resin material may be formed and this fluorescent material containing resin sheet may be pasted onto the top surface of  
5 the base as the fluorescent material containing layer.

The above-mentioned fluorescent material 30 is excited by luminescence energy from the light emitting diode element 20 to convert visible light of short wavelength into visible light of long wavelength. It is made of, for example,  
10 fluorescent substances such as an yttrium compound.

Accordingly, while the above-described light emitting diode element 20 emits blue light 31 upward, sideways, and downward from the interface surface between the n-type semiconductor 23 and the p-type semiconductor 24, the blue light  
15 31 emitted downward in particular impinges the fluorescent material 30 dispersed in the fluorescent material containing layer 21 to excite the fluorescent material 30 so that it is converted in wavelength into yellow light 32 and emitted in all directions. Then, this yellow light 32 blends with the blue  
20 light 31 that is emitted upward and sideways from the above-mentioned light emitting diode element 20, so as to present white luminescence when the light emitting diode 11 is seen.

The surface side of the above-described light emitting  
25 diode element 20 is protected by a resin seal member 33 of

rectangular solid shape, through which the aforementioned blue light 31 and wavelength-converted yellow light 32 travel straight ahead. Since it is chiefly composed of an epoxy type transparent resin and has no fluorescent material dispersed therein as distinct from heretofore, this resin seal member 33 is favorable in light transmittance, consequently achieving an improvement in the intensity of the white luminescence blended. Moreover, in this embodiment, the fluorescent material 30 is dispersed into the adhesive 29. Therefore, in contrast to the conventional cases where fluorescent materials are dispersed into resin seal members, the fluorescent material 30 produces no deviation in dispersion so that variations in chromaticity is suppressed during light emission. Furthermore, in this embodiment, the fluorescent material containing layer 21 is far off the top surface of the resin seal member 33 and is hidden in the back side of the light emitting diode element 20. This means a structure less prone to effect of ultraviolet rays. Incidentally, dispersing agents such as silicon dioxide may be mixed into the resin seal member 33 for more uniform luminescence.

The reflection efficiency of the light emitted backward from the light emitting diode element 20 can also be improved by providing a thin film layer of high reflectivity such as copper foil and aluminum foil on the bottom side of the fluorescent material containing layer 21 described above, or

by extending, as shown in Fig. 4, one topside electrode (cathode electrode) 13 to form a mounting surface 35 and fixing the light emitting diode element 20 onto this mounting surface 35 via the fluorescent material containing layer 21.

5 Figs. 5 and 6 show the second embodiment of the present invention. In this embodiment, a rectangular hole 37 somewhat smaller than the plane shape of the light emitting diode element 20 is formed in the mounting surface 35 extended from the above-described topside electrode 13. This rectangular hole 10 37 is filled with the above-described fluorescent material containing layer 21, and the light emitting diode element 20 is placed on and fixed to the same. The other configurations are identical to those of the first embodiment described above. In this embodiment, when the fluorescent material containing 15 layer 21 is filled into this rectangular hole 37, the inner rim of the rectangular hole 37 functions as a dam 38 to prevent the fluorescent material containing layer 21 from flowing away. This ensures a predetermined thickness as well as secures a uniform thickness under the entire bottom surface of the light 20 emitting diode element 20. Incidentally, the dam 38 for ensuring a predetermined thickness is not limited to the mounting surface 35 which forms a part of the topside electrode 13 mentioned above.

Figs. 7 and 8 show the third embodiment of the present 25 invention. In this embodiment, the resin seal member 36 for



protecting the surface side of the light emitting diode element 20 is formed in a hemispherical shape, functioning as a lens portion of convex shape to enhance the upward light-gathering power. That is, light traveling straight through the resin seal member 36 is refracted upward at the interface surface so that the enhanced light-gathering power achieves an improvement in the intensity of white luminescence.

Fig. 9 shows the fourth embodiment of the present invention. In this embodiment, a cylindrical reflecting frame 40 is arranged at the topside center of glass epoxy substrate 12. A light emitting diode element 20 is placed therein, and the surface side of this light emitting diode element 20 is protected by a hemispherical resin seal member 36 as in the third embodiment described above. The reflecting frame 40 forms an upward reflecting surface of tapered shape, with an inner peripheral wall 41 tilting outward, so that the light emitted from the light emitting diode element 20 is reflected by the inner peripheral wall 41 for upward condensation. As in Fig. 3 described above, the light emitting diode element 20 is fixed to the top surface of the glass epoxy substrate 12 through the medium of a fluorescent material containing layer 21 having a fluorescent material 30 dispersed into an adhesive 29. When the fluorescent material containing layer 21 is arranged, the lower peripheral edge of the inner peripheral wall 41 of the reflecting frame 40 can make a dam to prevent the fluorescent

material containing layer 21 from flowing away, so as to ensure a predetermined layer thickness.

Therefore, according to this embodiment, the light emitted backward from the light emitting diode element 20 excites the fluorescent material 30 dispersed in the fluorescent material containing layer 21, and the light that is converted in wavelength by this excitation is reflected by the inner peripheral wall 41 of the reflecting frame 40 for upward condensation. Thus, both the reflected light condensed by the reflecting frame 40 and the light that travels directly through the resin seal member 36 from the light emitting diode element 20 are further condensed upward at the interface surface of the resin seal member 36. On this account, white luminescence of higher intensity as compared with the above-described embodiment is obtained. Incidentally, as shown in Fig. 10, the same reflecting frame 40 as described above may be provided in a resin seal member 33 of rectangular solid shape. In that case, the light gathering effect is obtained from the reflecting frame 40 alone.

Figs. 11 and 12 show the fifth embodiment of the present invention. The light emitting diode 11 according to this embodiment uses as its base a solid-molded substrate 45 molded of a liquid crystal polymer. A bowl-shaped cup portion 46 is formed in the center of the solid-molded substrate 45. A cathode and an anode, or topside electrodes, 13 and 14 are formed

on the top surface of the solid-molded substrate 45 to the right and left astride a slit 47 in the center. On the inner periphery of the above-mentioned cup portion 46 are formed a reflecting surface 48 which is integrally molded with the topside electrodes 13 and 14 mentioned above. This reflecting surface 48 is hollowed round at the bottom 49 of the cup portion 46, so that the solid-molded substrate 45 is seen directly. Then, the same fluorescent material containing layer 21 as described above is applied to this bottom 49, and the light emitting diode element 20 is placed on and fixed to the same. Incidentally, a pair of electrodes of the light emitting diode element 20 and the above-mentioned topside electrodes 13 and 14 are connected with each other using bonding wires 27 and 28. Even in this embodiment, when the fluorescent material containing layer 21 is arranged in this embodiment, the lower peripheral edge of the reflecting surface 48 makes a dam to prevent the fluorescent material containing layer 21 from flowing away, so as to ensure a predetermined layer thickness.

In addition, the above-mentioned light emitting diode element 20 and the bonding wires 27 and 28 are protected by a transparent resin seal member 33 which is formed on the top side of the solid-molded substrate 45, including the cup portion 46. In this embodiment, the thickness of the resin seal member 33 projecting to the top side of the solid-molded substrate 45 is suppressed, so that the light emitting diode 11 becomes low in

profile as a whole. Incidentally, underside electrodes integrally molded with the above-mentioned topside electrodes 13 and 14 are formed on the bottom side of the solid-molded substrate 45.

5 Therefore, even in this embodiment, the light emitted backward from the light emitting diode element 20 excites the fluorescent material 30 dispersed in the fluorescent material containing layer 21. The light that is converted in wavelength by this excitation is reflected by the reflecting surface 48  
10 of the cup portion 46 so that it travels upward to enhance the light-gathering power, presenting white luminescence of high intensity.

Fig. 13 shows the sixth embodiment of the present invention. The light emitting diode 11 according to this  
15 embodiment uses a solid-molded substrate 45 as in the fifth embodiment described above, but differs in that the resin seal member 36 for sealing the surface side of the light emitting diode element 20 is formed in a hemispherical shape. The top of the resin seal member 36 can be positioned generally right  
20 above the light emitting diode element 20 to enhance the light-gathering power. Therefore, the light-gathering power from the resin seal member 36 can be expected in addition to the light-gathering effect by the reflecting surface 48 of the cup portion 46, whereby white luminescence of yet higher  
25 intensity can be obtained.

Fig. 14 shows the seventh embodiment of the present invention. In this embodiment, a fluorescent material containing layer 39 is formed thinly on the top side of a rectangular-solid-shaped resin seal member 33 so as to allow color adjustment on the top surface. The fluorescent material containing layer 39 is composed of a fluorescent material 30 of the above-mentioned yttrium type or a different fluorescent material, dispersed into an organic solvent. It may be printed as paint on the top surface of the resin seal member 33, or formed into a sheet and pasted. The fluorescent material containing layer 39 is formed thinly, which makes it possible to minimize a drop in light transmittance in the resin seal member 33.

Fig. 15 shows the eighth embodiment of the present invention. In contrast to the embodiments described above, the adhesive 29 and the fluorescent material 30 are separated from each other. A fluorescent material containing resin 44 having the above-mentioned fluorescent material 30 dispersed into a transparent organic solvent is applied by print to the top surface of a glass epoxy substrate 12, and formed into a predetermined thickness through overprinting or the like. The fluorescent material containing resin 44 is dried before a transparent adhesive 29 is applied thereon to have a double-layer structure. A light emitting diode element 20 is placed on and fixed to the same. In this embodiment, the blue luminescence emitted backward from the light emitting diode

element 20 passes through the adhesive 29 and then impinges on the fluorescent material 30 dispersed in the fluorescent material containing resin 44 to excite the fluorescent material 30, so that it is converted in wavelength into yellow luminescence and emitted in all directions. Since the fluorescent material containing resin 44 is capable of securing a greater thickness and is easy to adjust in thickness, there is a merit that the degree of blend with blue luminescence is easily adjustable. Incidentally, aside from the above-described fluorescent material containing resin, it can also be formed by pasting a fluorescent material containing sheet.

Figs. 16 and 17 show the ninth embodiment of the present invention, in which a sheet metal substrate 50 pressed into a predetermined shape is used as the base, instead of the glass epoxy substrate 12 described above. This sheet metal substrate 50 is made of a material of favorable thermal conductivity, such as copper, iron, or phosphorus bronze. A cup portion 51 of bowl shape is press-formed in the center. As in the first embodiment described above, the bottom surface 52 of the cup portion 51 is provided with a fluorescent material containing layer 21 having a fluorescent material 30 dispersed into an adhesive 29, onto which is fixed a light emitting diode element 20. In this embodiment, because the fluorescent material containing layer 21 is applied directly onto the sheet metal substrate 50, an

insulating property is required of the adhesive 29. Besides, in this embodiment, epoxy resin 53 is filled into the recesses at the back side of the sheet metal substrate 50 in order to secure the rigidity of the substrate. A splitting slit 54 is formed in one end of the sheet metal substrate 50 so that the right and left splits of the sheet metal substrate 50 themselves form a pair of topside electrodes.

Thus, connecting both electrodes of the light emitting diode element 20 and the right and left top surfaces of the sheet metal substrate 50 with each other using bonding wires 27 and 28 can establish conduction to the light emitting diode element 20. The inner peripheral wall of the above-mentioned cup portion 51 forms a reflecting surface 55 of tapered shape, and is combined with a hemispherical resin seal member 36 for sealing the surface side of the light emitting diode element 20 to enhance the light-gathering power. Incidentally, even in this embodiment, the lower peripheral edge of the reflecting surface 55 functions as a dam for securing the thickness of the fluorescent material containing layer 21.

The light emitting diode 11 using the sheet metal substrate 50 may also be provided with a resin seal member 33 of rectangular solid shape with a flat top surface, as shown in Fig. 18. In this case, the splitting slit 54 is stopped by an insulating tape 56.

Fig. 19 shows the tenth embodiment of the present

invention. This embodiment of application to a multicolor light emitting diode 11a has a structure in which cathode electrodes 13a, 13b and anode electrodes 14a, 14b are patterned in right and left rows on the top surface of a rectangular glass epoxy substrate 12 to be the base, and the underside electrodes pass around behind via their respective through holes 19.

A first light emitting diode element 20a and a second light emitting diode element 20b are mounted on the pair of cathode electrodes 13a and 13b formed on the top surface of the above-mentioned glass epoxy substrate 12, respectively. The first light emitting diode element 20a is a blue light emitting element made of the gallium nitride type compound semiconductor described above, and is connected to the above-mentioned cathode electrode 13a and anode electrode 14a with bonding wires 27 and 28.

Moreover, the first light emitting diode element 20a is adhesive bonded to the top surface of the cathode electrode 13a via a fluorescent material containing layer 21 arranged on its back side. This fluorescent material containing layer 21, as described above, is composed of an insulative adhesive as the base and an appropriate amount of fluorescent material uniformly dispersed into the same. This is applied to the top surface of the cathode electrode 13a with a predetermined thickness. With the light emitting diode element 20a placed thereon, the adhesive is heat solidified to fix the back surface



of the first light emitting diode element 20a to the top surface of the cathode electrode 13a.

Meanwhile, the second light emitting diode element 20b is a red light emitting diode element made of a gallium aluminum indium phosphide type compound semiconductor (GaAlInP). It is fixed onto the cathode electrode 13b via a conductive adhesive 43 and is connected to the anode electrode 14b with a bonding wire 28.

In addition, the light emitting diode elements 20a and 20b arranged in a row on the top surface of the glass epoxy substrate 12 are protected at the surface side by a transparent resin seal member 33. This resin seal member 33 is composed chiefly of epoxy resin, and formed in a rectangular solid shape over the top side of the glass epoxy substrate 12 except the individual through holes 19 in the above-described cathode electrodes 13a, 13b and anode electrode 14a, 14b.

Thus, in the multicolor light emitting diode 11a of the embodiment described above, the current flow through the first light emitting diode element 20a produces, as shown in Fig. 3 cited before, blue luminescence at the interface surface between the n-type semiconductor 23 and the p-type semiconductor 24. This blue luminescence is emitted upward, sideways, and downward as blue light 31. In particular, the blue light 31 emitted downward excites the fluorescent material 30 dispersed into the fluorescent material containing layer 21,

undergoes wavelength conversion, and is emitted in all directions as yellow light 32. Then, this yellow light 32 blends with the blue light 31 emitted upward and sideways from the above-mentioned first light emitting diode element 20a so as to be recognized as white luminescence when the multicolor light emitting diode 11a is seen. The surface side of the first light emitting diode element 20a is protected by the resin seal member 33 of rectangular solid shape, through which the aforementioned blue light 31 and wavelength-converted yellow light 32 travel straight ahead. Since it is chiefly composed of an epoxy type transparent resin and includes no fluorescent material as distinct from heretofore, this resin seal member 33 is favorable in light transmittance, consequently achieving an improvement in the intensity of the white luminescence. Besides, in this embodiment, white luminescence can be obtained simply by passing a current through the first light emitting diode element 20a. This means significantly lower current consumption as compared with the conventional cases where a plurality of lights emitted from light emitting diode elements are blended to obtain white luminescence.

Meanwhile, red luminescence can be obtained by passing a current through the second light emitting diode element 20b. Since the resin seal member 33 is transparent, red luminescence of high intensity can be obtained without any drop in light transmittance.

Fig. 20 shows the eleventh embodiment of the present invention, in which the second light emitting diode element 20b for red luminescence in the foregoing embodiment is replaced by one for blue luminescence and is placed on the cathode electrode 13b. This blue light emitting diode element 20b is made of the same gallium nitride type compound semiconductor as the first light emitting diode element 20a. It is thus fixed on the top surface of the cathode electrode 13b via an insulative adhesive 42 and is put into conduction with the cathode electrode 13b and the anode electrode 14b by bonding wires 27 and 28, respectively. Incidentally, since the other configurations are identical to those of the tenth embodiment described above, detailed description thereof will be omitted.

In this embodiment, the first light emitting diode element 20a presents white luminescence as in the foregoing embodiment, whereas the second light emitting diode element 20b produces blue luminescence when a current is supplied thereto. In this way, blue and white, two-color luminescence can be easily obtained despite the mounting of the precisely identical light emitting diode elements.

Fig. 21 shows the twelfth embodiment of the present invention. The multicolor light emitting diode according to this embodiment is of full color and, as distinct from heretofore, can produce every color with its four light emitting diode elements. That is, in this configuration, white

luminescence is emitted by a first light emitting diode element 20a, and all the colors other than white are displayed by combinations of second, third, and fourth light emitting diode elements 20b, 20c, and 20d. Cathode electrodes 13a-13d and anode electrodes 14a-14d are formed in four rows on an oblong glass epoxy substrate 12, and the first through fourth light emitting diode elements 20a-20d are mounted on the cathode electrodes 13a-13d in succession. In this embodiment, the first through fourth light emitting diode elements 20a, 20b, 20c, and 20d are light emitting diode elements for white, green, blue, and red, respectively. The first to third light emitting diodes 20a, 20b, and 20c each are made of gallium nitride type compound semiconductor. The fourth light emitting diode element 20d is made of a gallium aluminum indium phosphide type compound semiconductor.

The first light emitting diode 20a mentioned above is fixed to the top surface of the cathode electrode 13a with a fluorescent material containing layer 21. The second and third light emitting diode elements 20b and 20d are fixed to the top surfaces of the cathode electrodes 13b and 13c with an insulative adhesive 42. Besides, the fourth light emitting diode element 20d is fixed to the top surface of the cathode electrode 13d with a conductive adhesive 43. Incidentally, the first to third light emitting diode elements 20a, 20b, and 20c are connected to the respective cathode electrodes 13a, 13b,

and 13c by bonding wires 27. Including the fourth light emitting diode element 20d, they are connected to the anode electrodes 14a, 14b, 14c, and 14d by bonding wires 28. Above the first through fourth light emitting diode elements 20a-20d is provided a protection by an integrally-formed resin seal member 33 of rectangular solid shape.

Accordingly, in this embodiment, the individual light emitting diode elements 20a, 20b, 20c, and 20d not only can emit monochromatic luminescence, but the values of the currents to the second through fourth light emitting diode elements 20b, 20c, and 20d for green, blue, and red luminescence can be controlled to produce luminescence of any color as well. Moreover, white luminescence can be obtained by making the first light emitting diode element 20a emit monochromatic luminescence. This eliminates the need for delicate current control as in conventional full-color light emitting diodes.

Incidentally, while any of the above-described embodiments has dealt with a light emitting diode of chip type which is surface-mounted directly on the printed wires 16 and 17 on a motherboard 15 as shown in Fig. 2, the light emitting diodes of this invention may also be applied to the lead-frame types described in the conventional examples. That is, an adhesive that contains a fluorescent material can be applied to recesses in the metal stems to mount light emitting diode elements on, and light emitting diode elements made of gallium

nitride type compound semiconductor can be fixed onto the same so that white luminescence of high intensity is obtained without the fluorescent material being dispersed into resin seal members of bombshell form.

5           Moreover, while the above-described embodiments each have dealt with the case where a light emitting diode element and a pair of topside electrodes are connected with each other using bonding wires, this invention is not limited thereto, and also covers such connection methods as flip chip mounting using  
10 solder bumps.

          Furthermore, while the above-described embodiments each have dealt with the case where the light emitting diode element(s) is/are made of gallium nitride type compound semiconductor, the same configurations are also available in  
15 the cases of using light emitting diode elements for blue luminescence, formed of SiC type compound semiconductor.

#### Industrial Applicability

20           As has been described, a light emitting diode according to the present invention can present white luminescence of high intensity, and thus is useful as a white light source in various types of display units or in optical communication.

          Besides, a light emitting diode according to the present invention is useful as a multicolor light emitting diode that  
25 is low in current consumption and easy of current control.

## CLAIMS

1. A light emitting diode comprising a light emitting diode element mounted on a base, said light emitting diode element being protected at its surface side by a resin seal member, the light emitting diode being characterized in that a fluorescent material containing layer is arranged on a back side of said light emitting diode element.

2. The light emitting diode according to claim 1, characterized in that said light emitting diode element is a light emitting diode for blue luminescence, made of gallium nitride type compound semiconductor or SiC type compound semiconductor.

3. A light emitting diode comprising two or more light emitting diode elements mounted on a base, said light emitting diode elements being protected at their surface side by a resin seal member, the light emitting diode being characterized in that: at least one of said two or more light emitting diode elements is a light emitting diode element for blue luminescence, made of gallium nitride type compound semiconductor or SiC type compound semiconductor; and a fluorescent material containing layer is arranged on a back side of said light emitting diode element for blue luminescence.

4. The light emitting diode according to claim 1 or 3, characterized in that: said fluorescent material containing

layer is composed of a fluorescent material dispersed into an adhesive; and a back of said light emitting diode element is firmly fixed to said base by the adhesive action of said fluorescent material containing layer.

5 5. The light emitting diode according to claim 1 or 3, characterized in that: said fluorescent material containing layer is formed with a fluorescent material and an adhesive separate from each other; and a fluorescent material containing resin layer and an adhesive layer are formed in layers on a top  
10 surface of said base.

6. The light emitting diode according to claim 4 or 5, characterized in that said fluorescent material containing layer is formed on the top surface of said base by printing means.

7. The light emitting diode according to claim 1 or 3,  
15 characterized in that said fluorescent material containing layer is a fluorescent material containing resin sheet pasted on a top surface of said base.

8. The light emitting diode according to any of claims 4, 5, and 7, characterized in that said fluorescent material is  
20 an yttrium compound.

9. The light emitting diode according to claim 1 or 3, characterized in that a periphery of said fluorescent material containing layer is surrounded by a dam provided on a top surface of said base.

25 10. The light emitting diode according to claim 1 or 3,



characterized in that a reflecting surface is arranged on a bottom side of said fluorescent material containing layer or a top surface of said base.

11. The light emitting diode according to claim 1 or 3,  
5 characterized in that an upward reflecting surface tilting outward is arranged around said light emitting diode elements.

12. The light emitting diode according to claim 1 or 3, characterized in that a lens portion of convex shape is formed on a top side of said resin seal member.

10 13. The light emitting diode according to claim 1 or 3, characterized in that: said resin seal member is formed flat at a top side; and a fluorescent material containing layer is formed on the top side.

14. The light emitting diode according to claim 1 or 3,  
15 characterized in that said base is a glass epoxy substrate, a solid-molded substrate of liquid crystal polymer, or a sheet metal substrate.

15. The light emitting diode according to claim 1 or 3, characterized in that: said light emitting diode element is  
20 connected to a pair of electrodes arranged on said base; and said electrodes are surface-mounted directly to printed wires on a motherboard.

# ABSTRACT

A light emitting diode comprising a light emitting diode element 20 mounted on a glass epoxy substrate 12, this light emitting diode element 20 being protected at its surface side by a resin seal member 33, in which: a light emitting diode element for blue luminescence, formed of gallium nitride type compound semiconductor is used as the above-mentioned light emitting diode element 20; and a fluorescent material containing layer 21 composed of a fluorescent material dispersed into an adhesive is arranged on the back side of this light emitting diode element. On the back side of the light emitting diode element 20, blue luminescence is converted in wavelength to produce white luminescence of high intensity.


13/13

## EXPLANATION OF NUMERALS


	11	LIGHT EMITTING DIODE
	12	GLASS EPOXY SUBSTRATE (BASE)
	13	TOPSIDE ELECTRODE
5	14	ANODE ELECTRODE
	15	MOTHERBOARD
	16	PRINTED WIRE
	17	PRINTED WIRE
	20	LIGHT EMITTING DIODE ELEMENT
10	21	FLUORESCENT MATERIAL CONTAINING LAYER
	29	ADHESIVE
	30	FLUORESCENT MATERIAL
	33	RESIN SEAL MEMBER
	36	RESIN SEAL MEMBER
15	38	DAM
	40	REFLECTING FRAME
	41	INNER PERIPHERAL WALL
	44	FLUORESCENT MATERIAL CONTAINING PAINT
	45	SOLID-MOLDED SUBSTRATE (BASE)
20	50	SHEET METAL SUBSTRATE (BASE)

09 / 763421

第1図

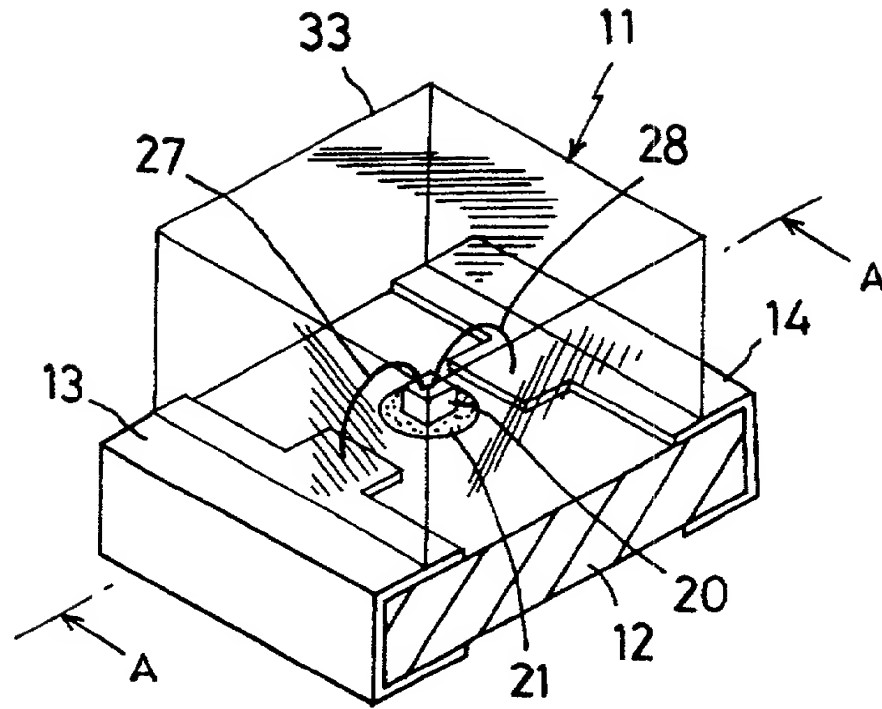


第2図

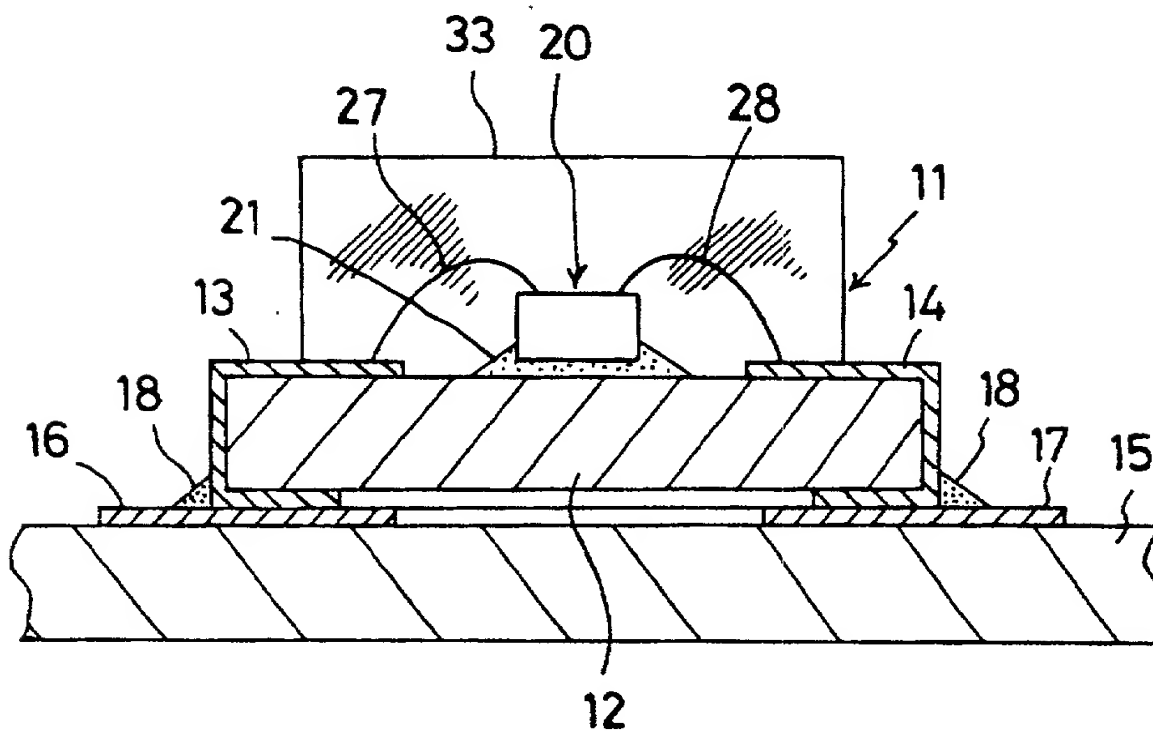




09/17/2001


第5図

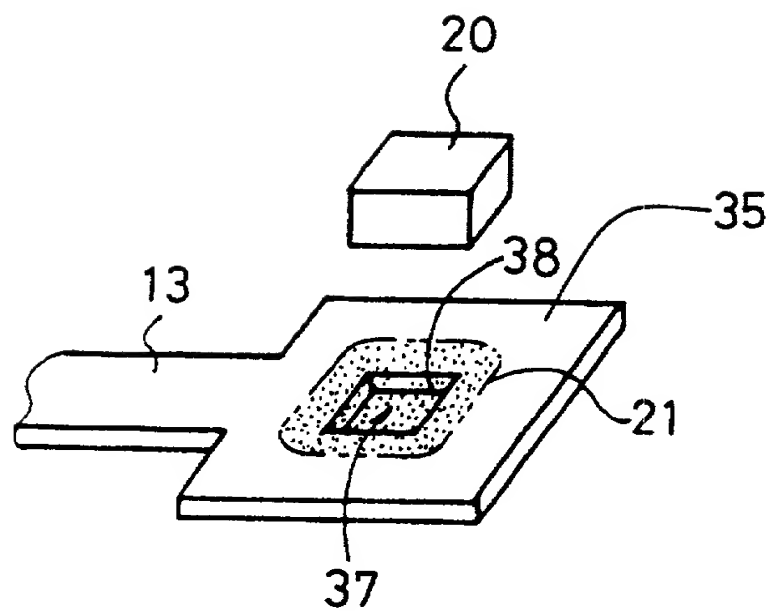


第6図

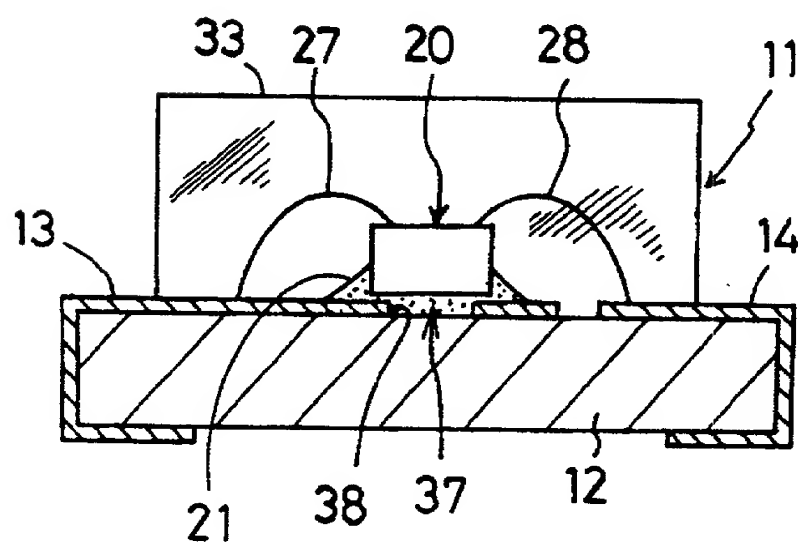


第7図

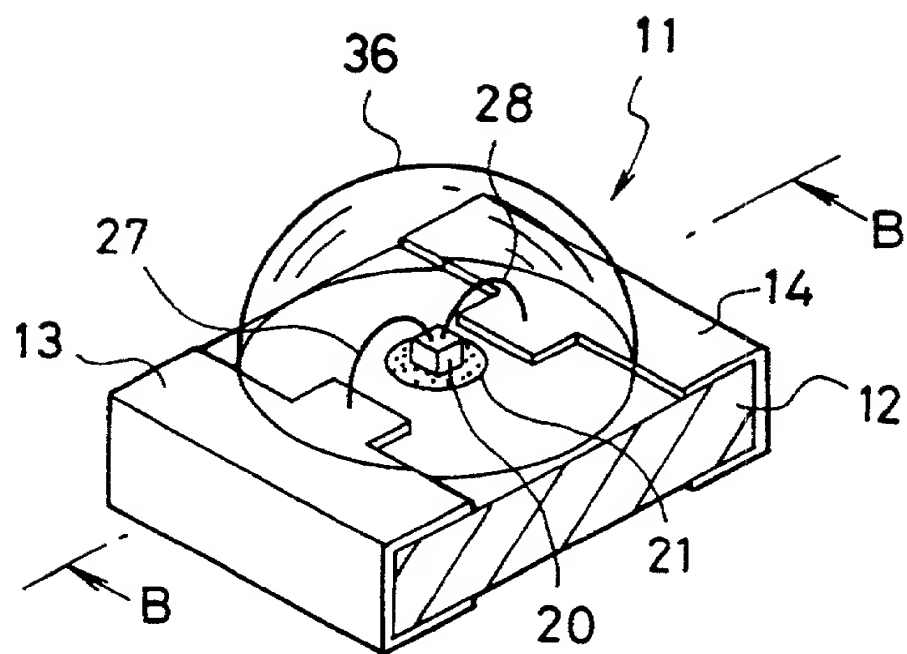


第8図

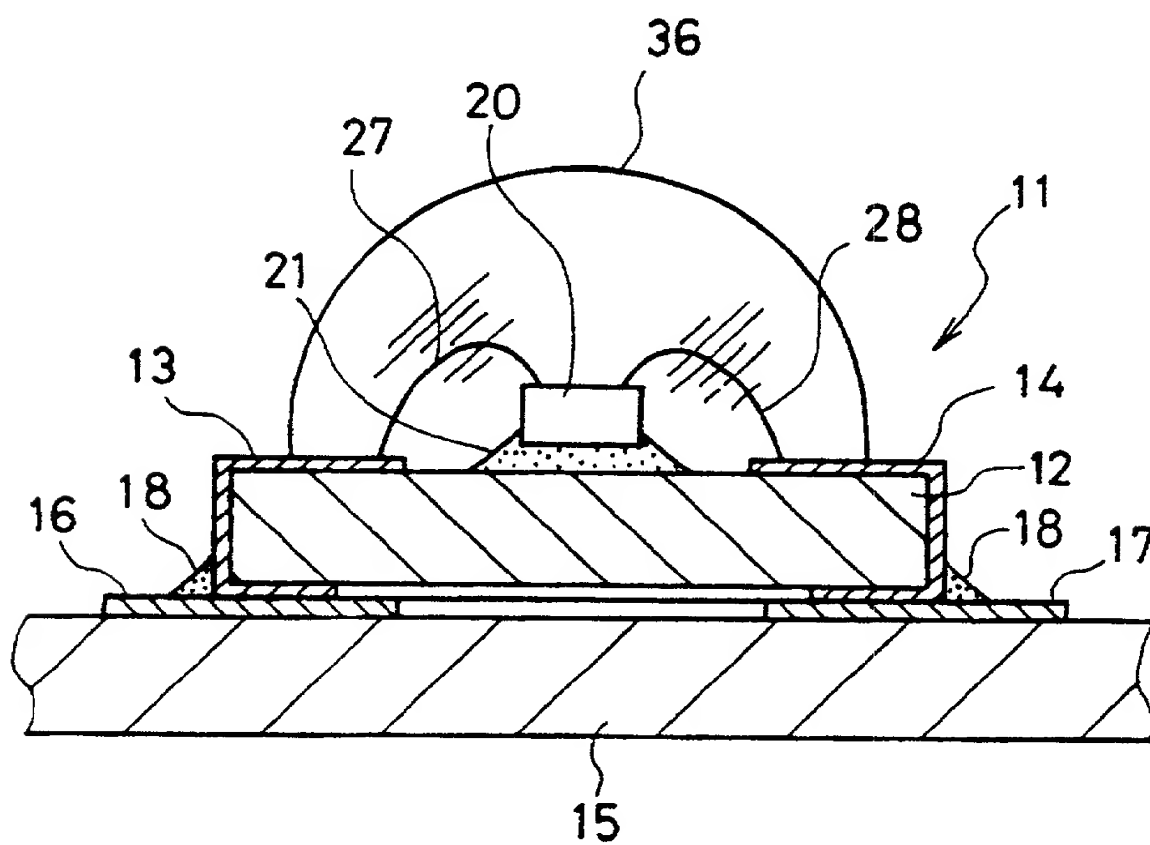

第9図

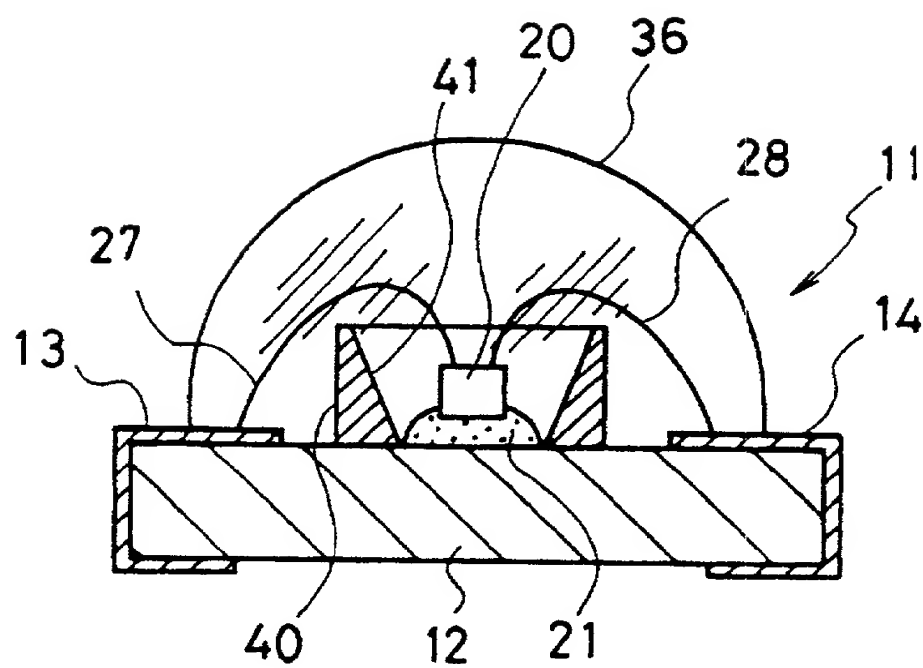


第10図

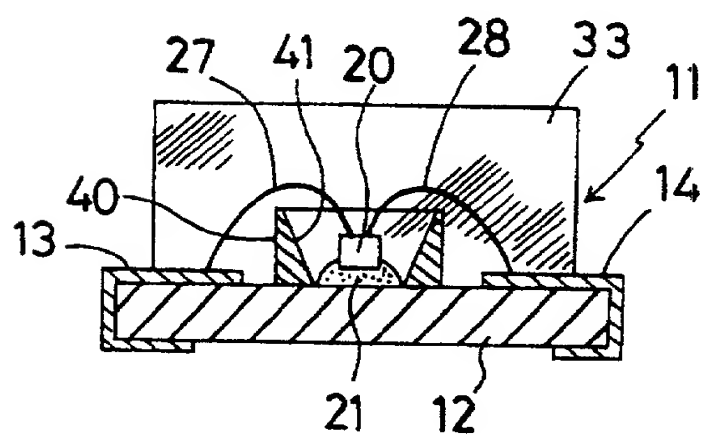





第 1 1 図

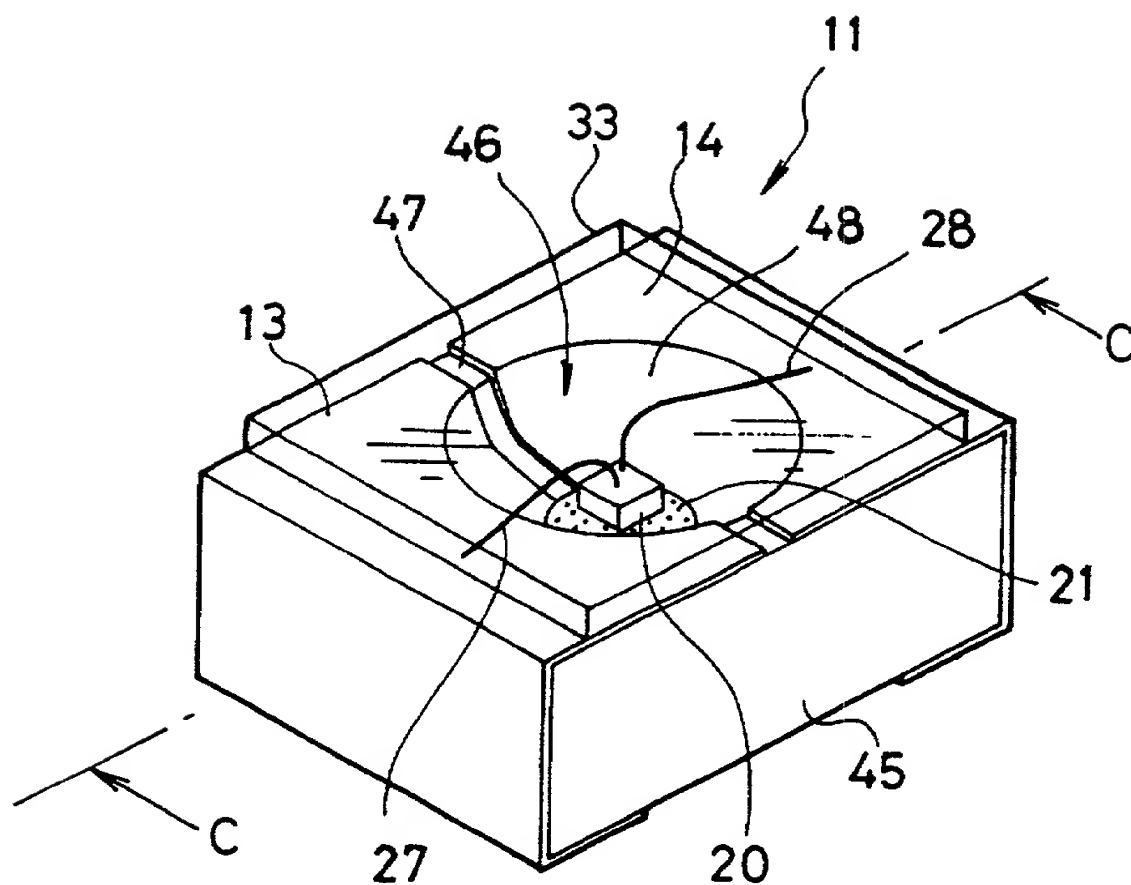


第 1 2 図

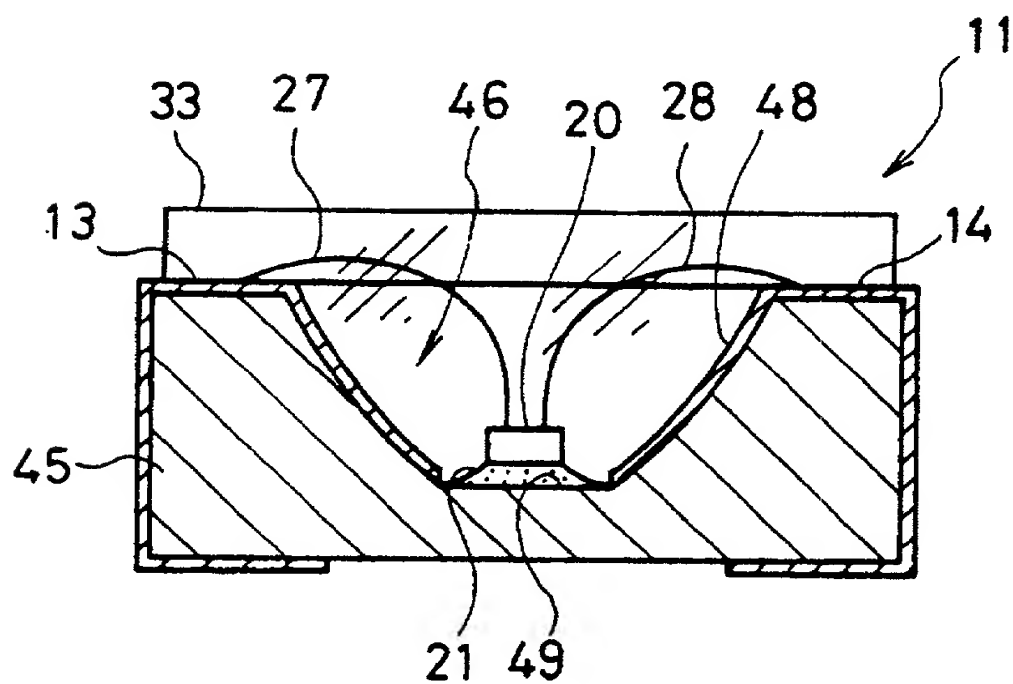


第 1 3 図

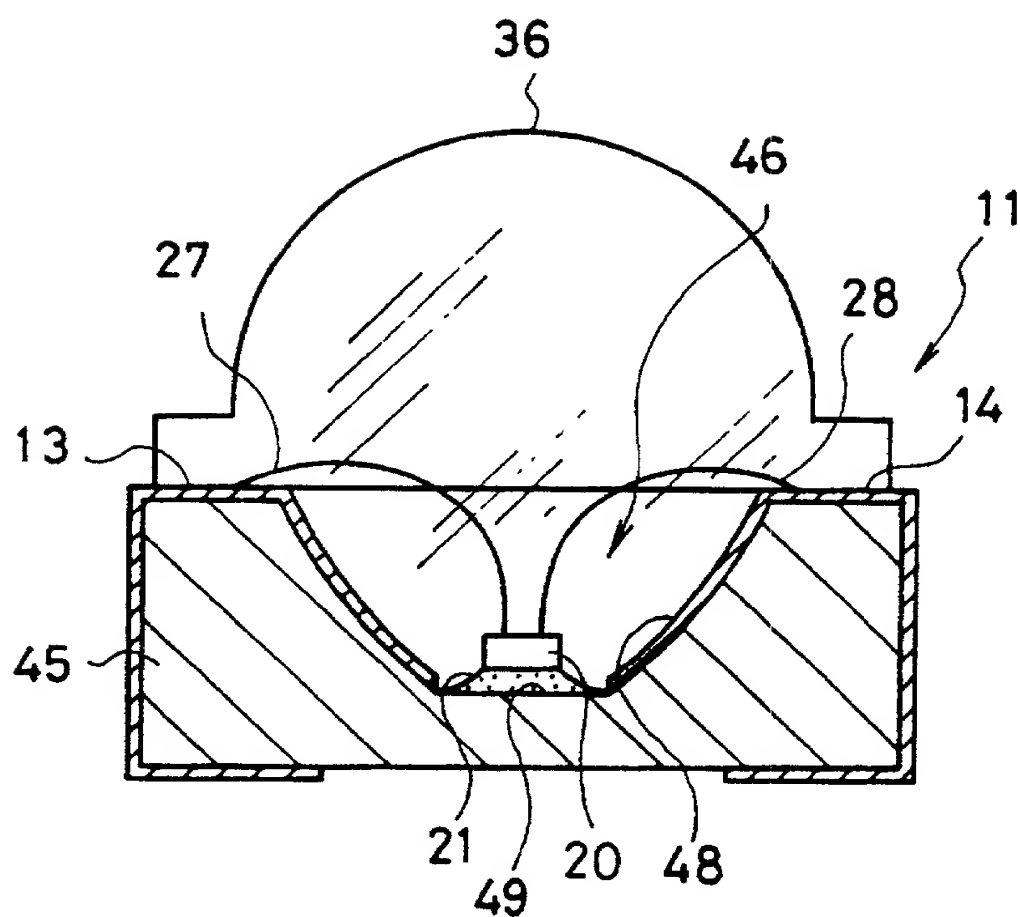


第 1 4 図

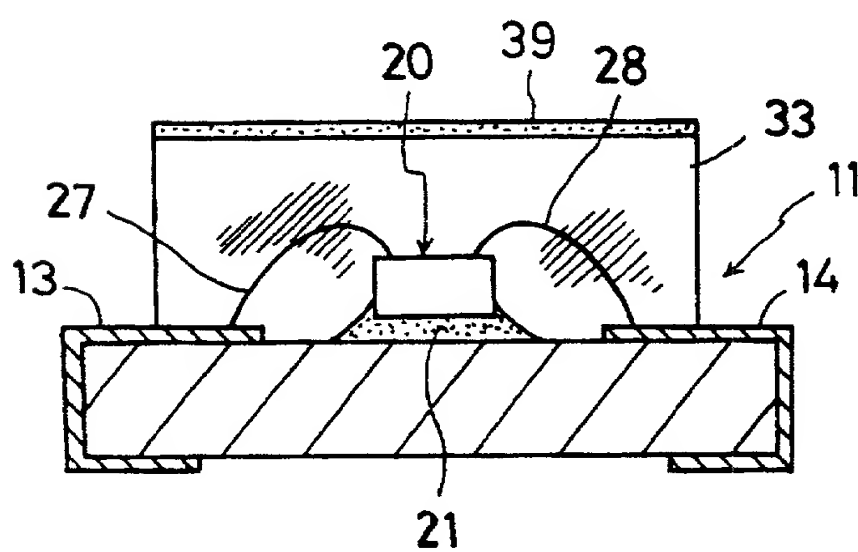


第15図

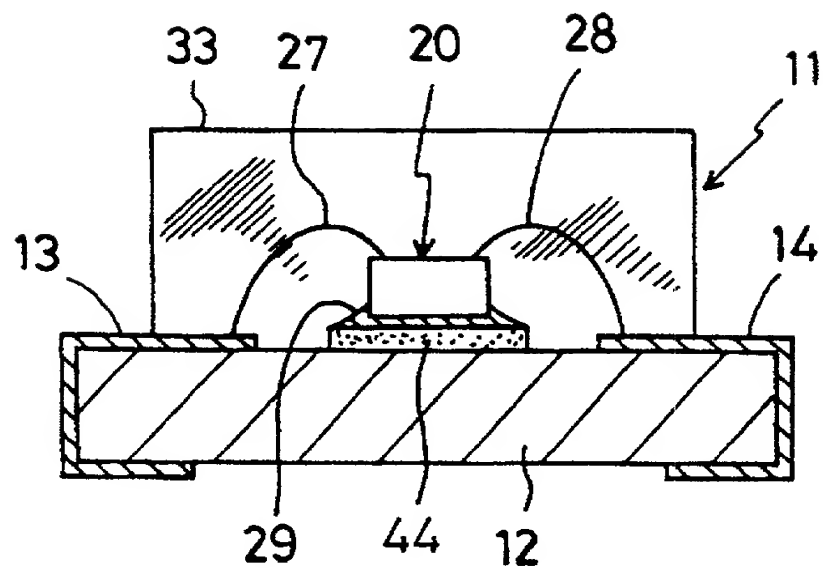


第16図

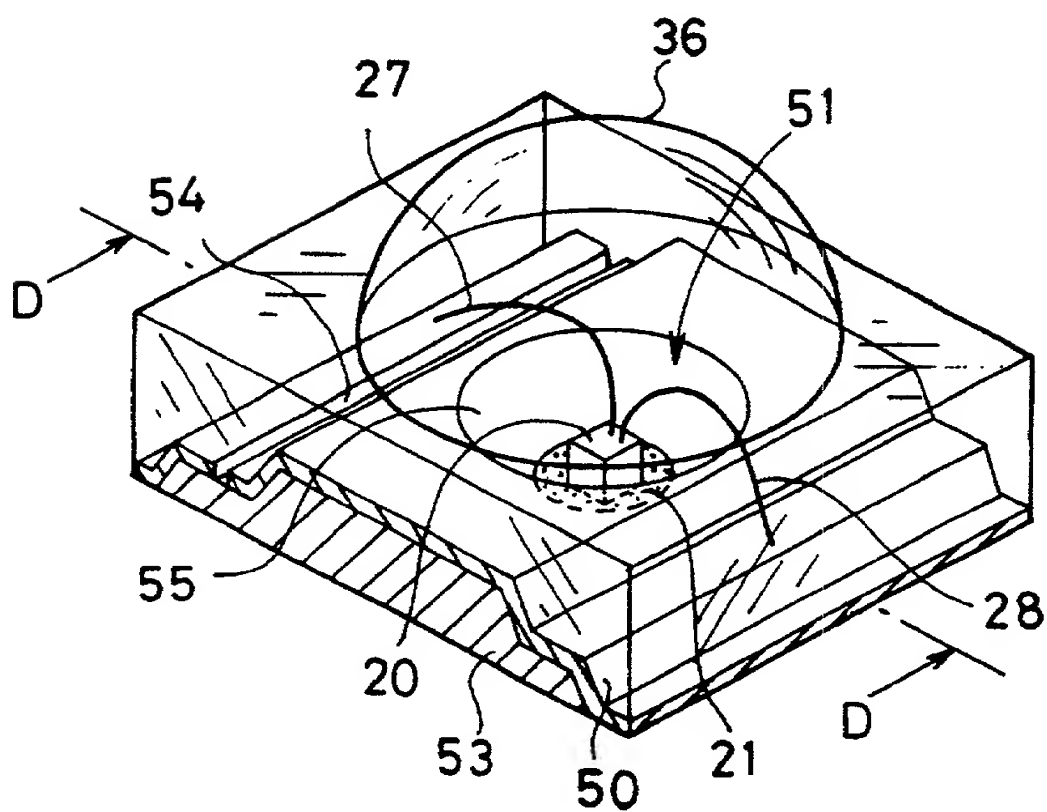


第 1 7 図

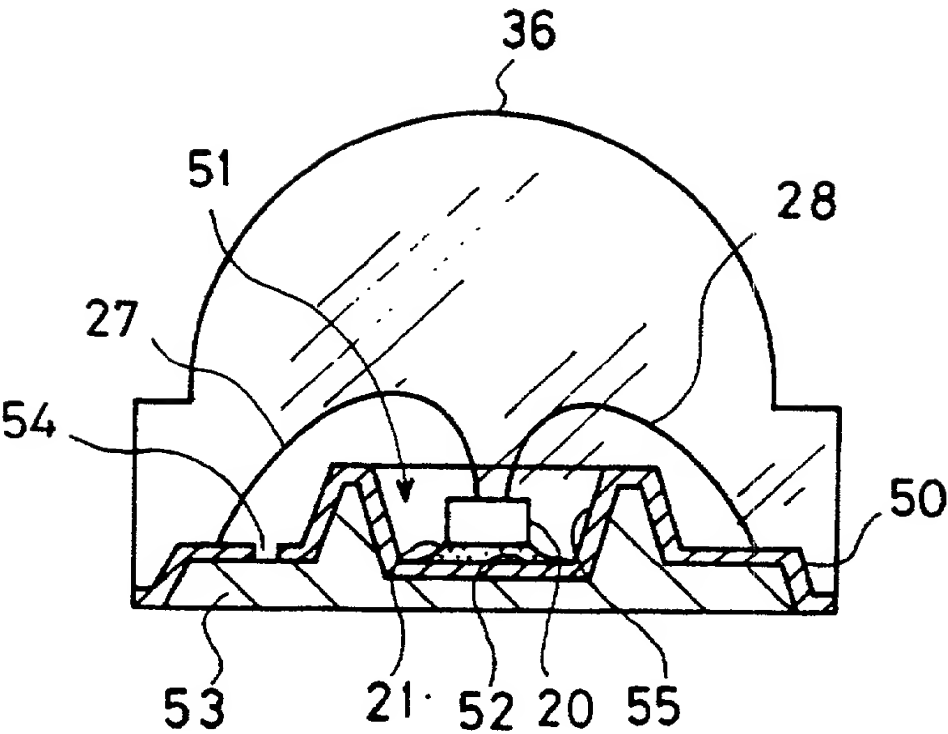


第 1 8 図

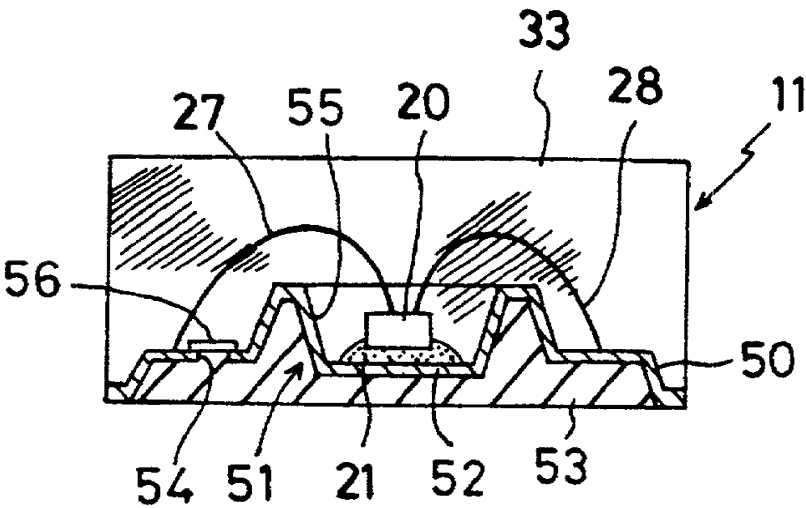


第19図

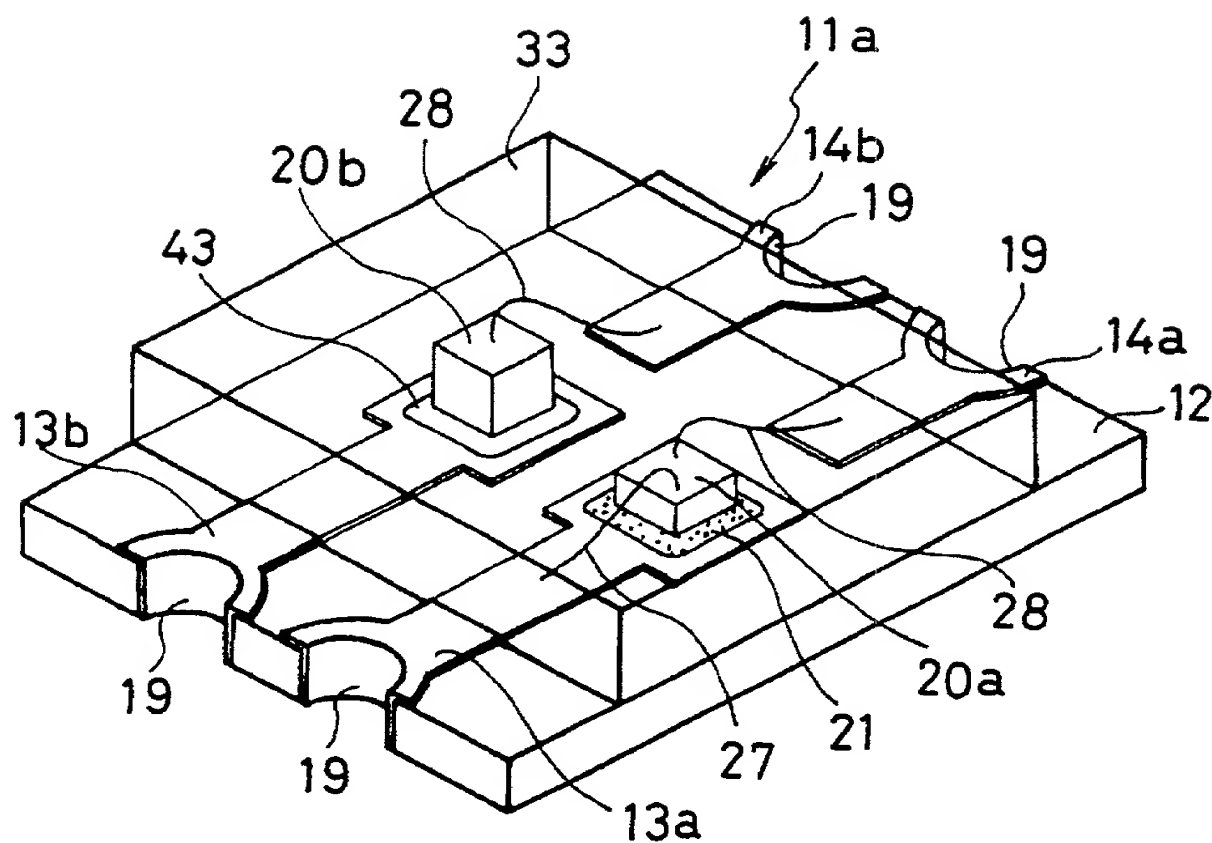


第20図

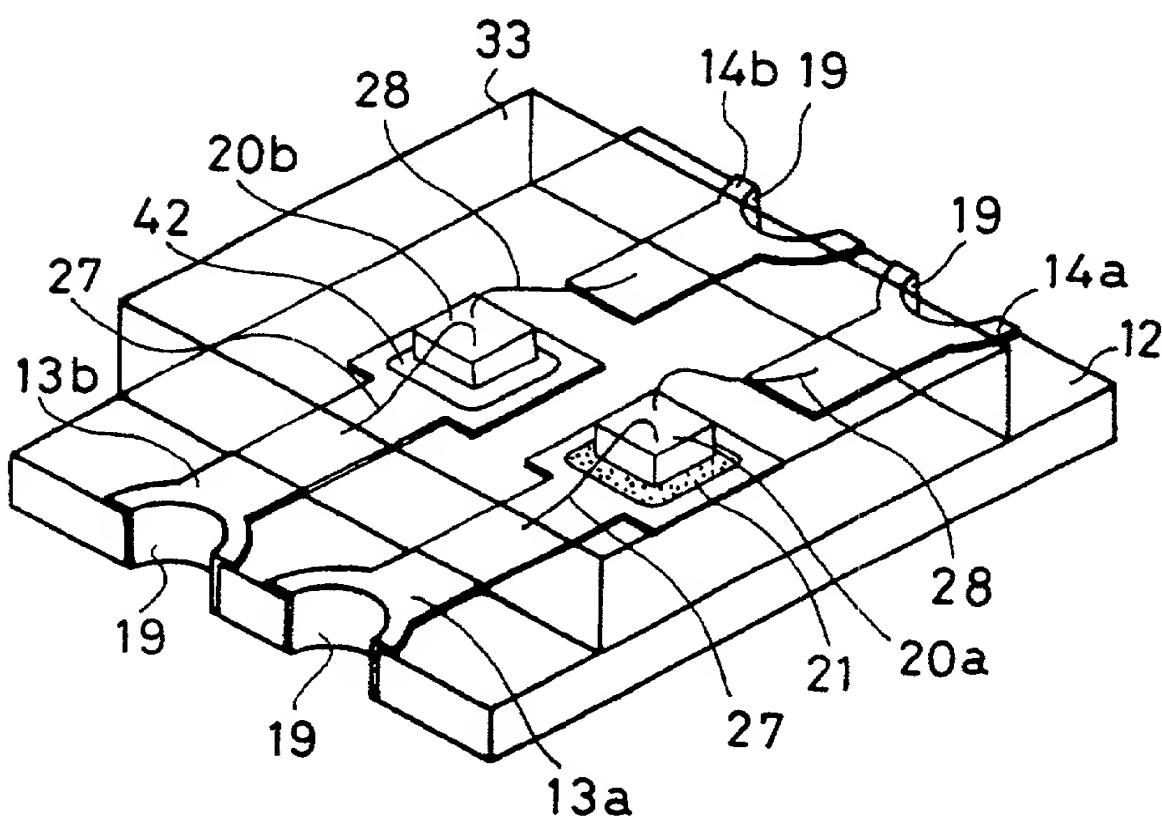


第 2 1 図

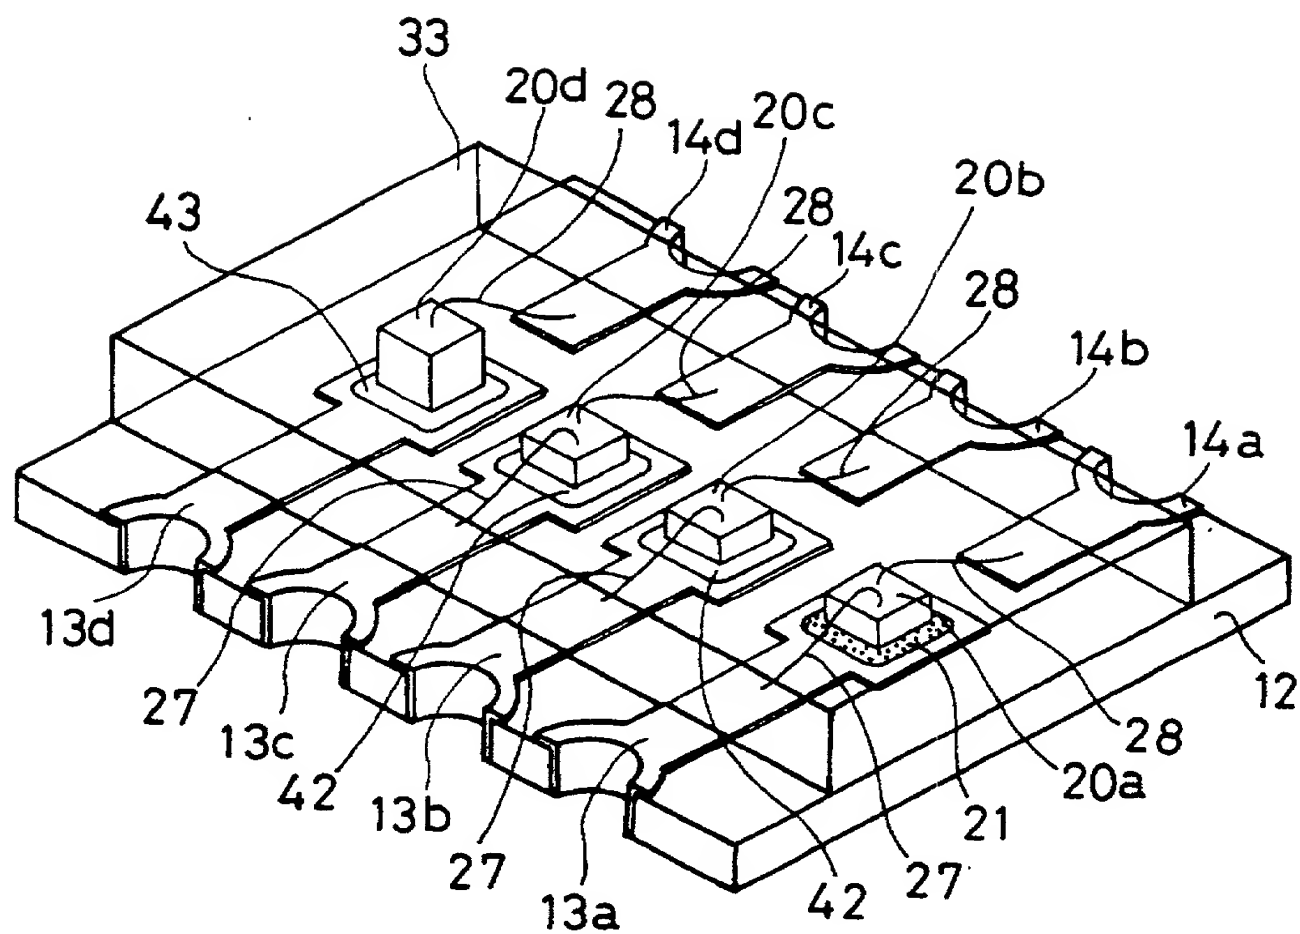

第 2 2 図

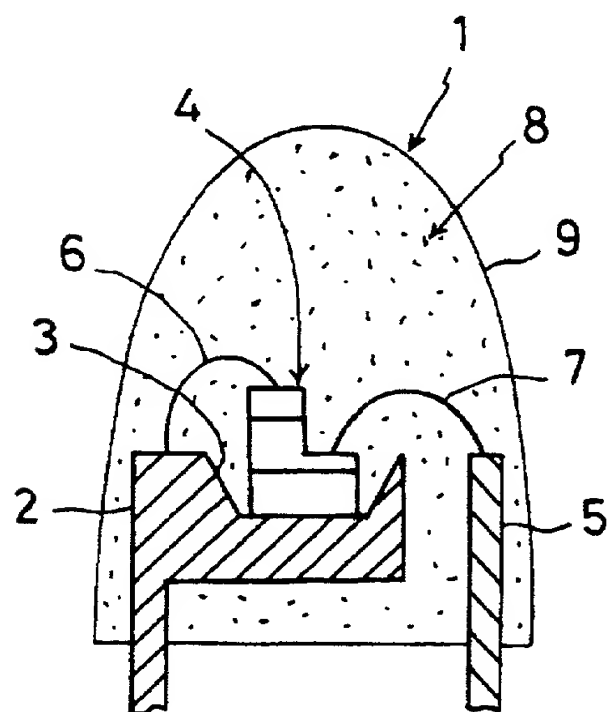

第 2 3 図

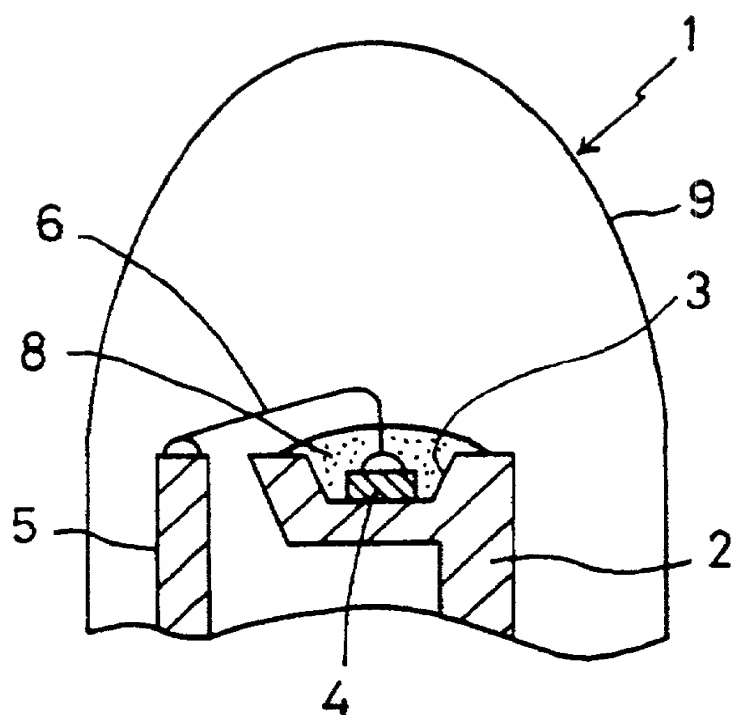

**Combined Declaration for Patent Application and Power of Attorney**

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name; and that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

LIGHT EMITTING DIODE

the specification of which (check one)

- ☐ is attached hereto;  
☐ was filed in the United States under 35 U.S.C. §111 on \_\_\_\_\_, as  
 U.S. Appln. No. \_\_\_\_\_\*; or  
☒ was/will be filed in the U.S. under 35 U.S.C. §371 by entry into the U.S. national stage of an international  
 (PCT) application, PCT/JP00/04006, filed June 20, 2000, entry requested on \_\_\_\_\_\*;  
 national stage application received U.S. Appln. No. \_\_\_\_\_\*; §371/§102(e) date \_\_\_\_\_\*  
 (\* if known)

and was amended on \_\_\_\_\_ (if applicable).

(include dates of amendments under PCT Art. 19 and 34 if PCT)

I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and I acknowledge the duty to disclose to the Patent and Trademark Office (PTO) all information known by me to be material to patentability as defined in 37 C.F.R. §1.56.

I hereby claim foreign priority benefits under 35 U.S.C. §§ 119 and 365 of any prior foreign application(s) for patent or inventor's certificate, or prior PCT application(s) designating a country other than the U.S., listed below with the "Yes" box checked and have also identified below any such application having a filing date before that of the application on which priority is claimed:

<u>11-176350</u>	<u>Japan</u>	<u>23 June 1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	YES	NO
<u>11-193441</u>	<u>Japan</u>	<u>7 July 1999</u>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
(Number)	(Country)	(Day Month Year Filed)	YES	NO
<u>11-204623</u>	<u>Japan</u>	<u>19 July 1999</u>	YES	

I hereby claim the benefit under 35 U.S.C. §120 of any prior U.S. non-provisional application(s) or prior PCT application(s) designating the U.S. listed below, or under §119(e) of any prior U.S. provisional applications listed below, and, insofar as the subject matter of each of the claims of this application is not disclosed in such U.S. or PCT application in the manner provided by the first paragraph of 35 U.S.C. §112, I acknowledge the duty to disclose to the PTO all information as defined in 37 C.F.R. §1.56(a) which occurred between the filing date of the prior application and the national filing date of this application:

_____ (Application No.)	_____ (Day Month Year Filed)	_____ (Status: patented, pending, abandoned)
_____ (Application No.)	_____ (Day Month Year Filed)	_____ (Status: patented, pending, abandoned)
_____ (Application No.)	_____ (Day Month Year Filed)	_____ (Status: patented, pending, abandoned)

As a named inventor, I hereby appoint the following registered practioners to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

**All of the practioners associated with Customer Number 001444**

Direct all correspondence to the address associated with Customer Number 001444; i.e.,

**BROWDY AND NEIMARK, P.L.L.C.**

**624 Ninth Street, N.W.**

**Washington, D.C. 20001-5303**

**(202) 628-5197**

The undersigned hereby authorizes the U.S. Attorneys or Agents appointed herein to accept and follow instructions from KANESAKA & SAKAI as to any action to be taken in the U.S. Patent and Trademark Office regarding this application without direct communication between the U.S. Attorneys or Agents and the undersigned. In the event of a change of the persons from whom instructions may be taken, the U.S. Attorneys or Agents appointed herein will be so notified by the undersigned.



Title: \_\_\_\_\_

U.S. Application filed \_\_\_\_\_, Serial No. \_\_\_\_\_

PCT Application filed \_\_\_\_\_, Serial No. \_\_\_\_\_

I hereby further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF FIRST INVENTOR Koichi FUKASAWA		INVENTOR'S SIGNATURE <i>K. Fukasawa</i>	DATE 2.5.2001
RESIDENT Minamitsuru-gun, Yamanashi, JAPAN JPX		CITIZENSHIP Japanese	
POST OFFICE ADDRESS 1-23-1, Kamikurechi, Fujiyoshida-shi, Yamanashi, 403-0001 JAPAN			
FULL NAME OF SECOND JOINT INVENTOR Junji MIYASHITA		INVENTOR'S SIGNATURE <i>J. Miyashita</i>	DATE 2.5.2001
RESIDENT Fujiyoshida-shi, Yamanashi, JAPAN JPX		CITIZENSHIP Japanese	
POST OFFICE ADDRESS 1-23-1, Kamikurechi, Fujiyoshida-shi, Yamanashi, 403-0001 JAPAN			
FULL NAME OF THIRD JOINT INVENTOR Kousuke TSUCHIYA		INVENTOR'S SIGNATURE <i>K. Tsuchiya</i>	DATE 2.5.2001
RESIDENT Fujiyoshida-shi, Yamanashi, JAPAN JPX		CITIZENSHIP Japanese	
POST OFFICE ADDRESS 1-23-1, Kamikurechi, Fujiyoshida-shi, Yamanashi, 403-0001 JAPAN			
FULL NAME OF FOURTH JOINT INVENTOR		INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF FIFTH JOINT INVENTOR		INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF SIXTH JOINT INVENTOR		INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP	
POST OFFICE ADDRESS			
FULL NAME OF SEVENTH JOINT INVENTOR		INVENTOR'S SIGNATURE	DATE
RESIDENT		CITIZENSHIP	
POST OFFICE ADDRESS			